

ICID Plus

100-200mm Diameter Range
Twin Wall Insulated System Chimney
for Gas, Oil, Wood and Multi-fuel

NEW
now with
**LIFETIME
GUARANTEE!**



Product Description


Our Eco ICID range has evolved into a multi-application system adaptable for Dry (D), Fu (W) and even Positive Pressure (P) applications. At Schiedel, we pride ourselves on our technology and innovation and this heating season introduce our evolutionary 3-in-1 system:

ICID Plus Ideal not only for traditional stoves but also for pellet stoves, biomass appliances, mini/micro CHP and even condensing boilers capable of withstanding positive pressure.

The system is designed so that the outer case is load bearing and the inner liner is free to expand independently, therefore thermal expansion is accommodated within each and every joint of the system.

Available in two versions with a choice of either a bright annealed or a matt black painted stainless steel outer case, ICID Plus is available in the following range of diameters:- 100, 125, 150, 180 and 200mm.

Joint Design

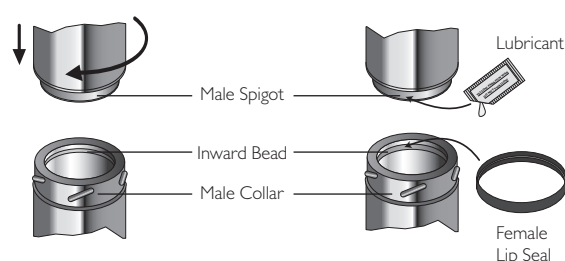

WITHOUT LIP SEAL
ICID Plus for N rated
Negative Pressure Applications
(i.e Stoves)

WITH LIP SEAL
ICID Plus for P rated
Positive Pressure Applications
(i.e Condensing Boilers)

ICID PLUS PRODUCT FEATURES

- Twist-lock bayonet joining system. Secured by locking band.
- Advanced corrosion resistant design and construction uses laser welded 316L stainless steel inner liner and stainless steel case.
- The 25mm of high density mineral wool insulation maintains flue gas temperature, maximising efficiency, improving flue draught on start up and minimising condensation.
- Low external case temperature.
- The inner liner is free to expand through the female collar, allowing for maximum thermal expansion even during a soot fire.
- The inner liner has an engineered design with an inward bead at the female end which acts as a capillary break preventing moisture being drawn through the joint.
- Lip seal packs are available containing a quick fit female lip seal with a grease sachet to allow product to be easily adapted for use in Positive Pressure (P) applications for use on condensing positive pressure appliances.

Technical Data

	ICID (without Lip Seal)	ICID Plus (with Lip Seal)
Fuel	Wood, solid fuel	Gas, Oil
Firing Temp	450°C	200°C
Short Firing Temp	550°C	250°C
Thermal Shock	1000°C	-
Mode of Operation	Zero & Negative Pressure	Positive Pressure
Pressure Capabilities	40Pa	200Pa
Fire Rating	4 Hour Fire Rating to BS 476 Part 20	
Outer Case (Standard)	Stainless Steel	
Outer Case (Option)	Painted matt black	
Outer Case Thickness	0.5mm	
Seam	Laser or inert gas welded	
Liner	316L : 1.4404 : X2CrNiMo 17-12-2	
Liner Thickness (mm)	0.5mm	
Seam	Laser or inert gas welded	
Insulation	High performance mineral fibre	
Insulation Thickness	25mm	
Average Thermal Resistance (200°C)	0.4m ² k/W	

CORROSION RESISTANCE

Chimneys are subject to significant corrosion attack by flue gas condensates, particularly from solid fuel. ICID Plus is specifically designed and manufactured to resist this corrosion.

CHIMNEY DIAMETER

The chimney size should be as recommended by the appliance manufacturer. Where there is a requirement for a flue diameter smaller than the appliance spigot, then the operational requirements of the appliance and the configuration of the flue must satisfy the flue sizing requirements of EN13384-1 for single appliances, and EN13384-2 for multi appliances.

Approvals



ICID is CE Certified to EN1856-1 TÜV 0036 CPR 9195 010 with designations:


ICID is CE Certified to EN1856-2 TÜV 0036 CPR 9195 042 with designations:

System Chimney EN1856-1		
T450 NI W V2 L50050 G60 T450 NI D V3 L50050 G60 60mm Distance to combustibles in a combustible shaft*	T450 NI W V2 L50050 G50 T450 NI D V3 L50050 G50 50mm Distance to combustibles in a non combustible shaft or in free air*	T200 PI W V2 L50050 O00 Zero distance to combustibles*
Connecting Flue Pipe EN1856-2		
T450 NI D V2 L50050 G100 M		


- Manufactured under a Quality Management Scheme approved to BS EN ISO 9001
- 4 Hour Fire Rating to BS476 Part 20
- Certified for corrosion resistance on gas, oil and solid fuel by Gastec, MPA and TÜV
- HETAS listed for use on solid fuel applications.

* For full information refer to p.22 and p.24


Typical Installations for Solid Fuel Applications

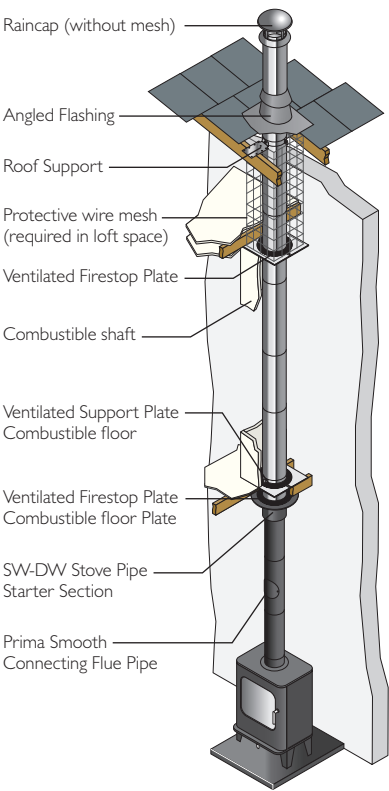


INTERNAL HOUSE
Combustible Floors

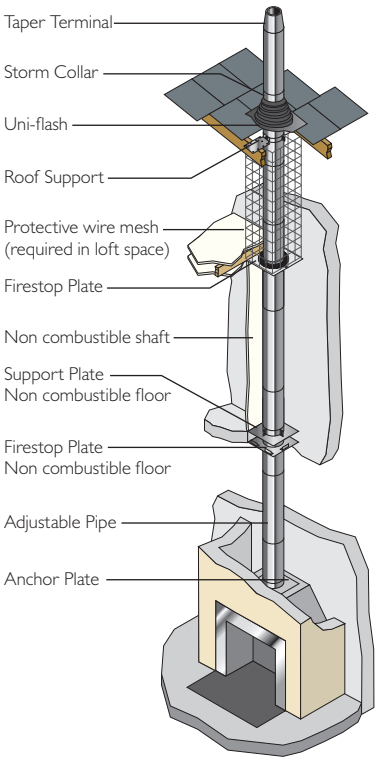

INTERNAL HOUSE
Non Combustible Floors

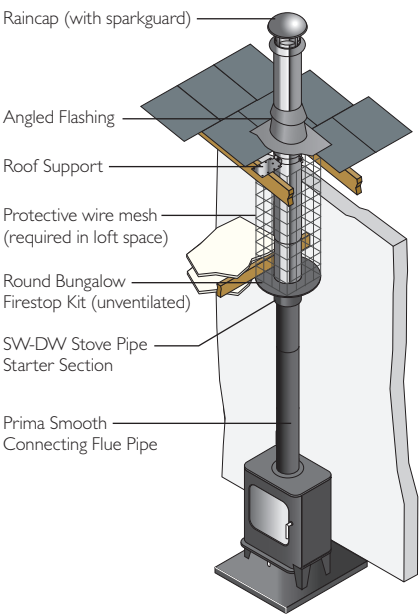


INTERNAL BUNGALOW
(VENTILATED LOFT SPACE)
Combustible and Non-Combustible floors

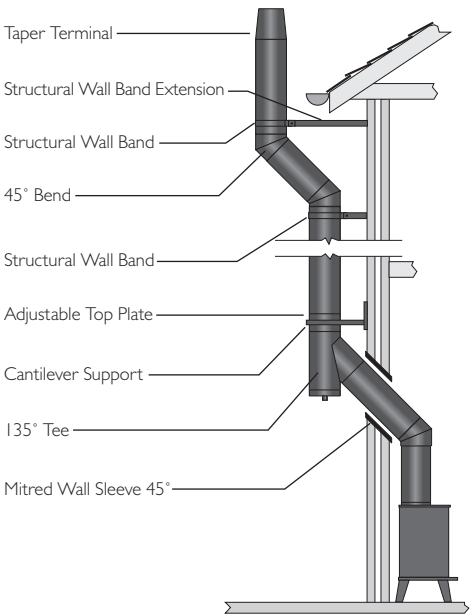


EXTERNAL
System Chimney

Typical Installations

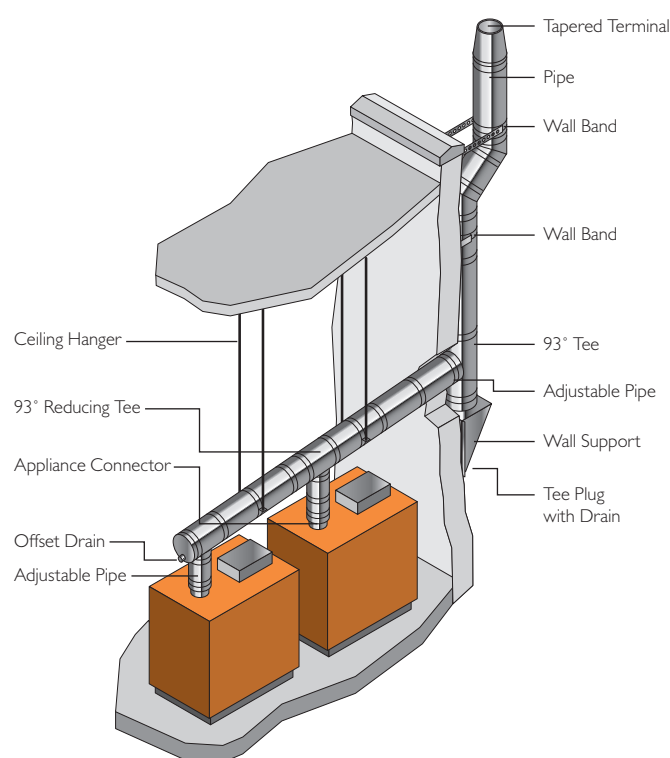

TYPICAL CONDENSING BOILER INSTALLATION

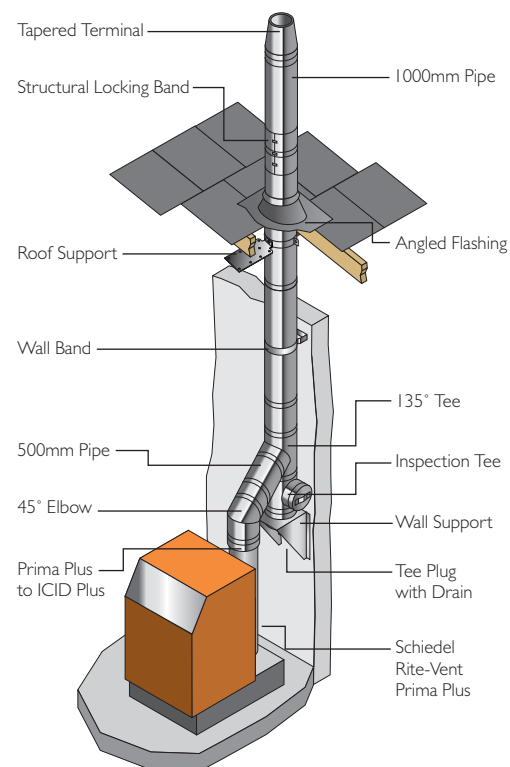

TYPICAL BIOMASS INSTALLATION

Gasket kits (for use in P rated positive pressure applications)



Female Viton Lip Seal Kit

Int Ømm	100	125	150	180	200
Ext Ømm	150	180	200	230	250
SAP Code	147322	147323	147324	147325	147326

This female lip seal must be used on wet positive pressure applications and fits into the inward bead on the female socket on the inside of the liner immediately below the male collar.



Adjustable Pipe Seal Kit

Int Ømm	100	125	150	180	200
Ext Ømm	150	180	200	230	250
SAP Code	152135	152136	152137	152138	152139

This kit consists of a female viton seal which fits into the inward bead on the female socket on the inside of the liner immediately below the male collar and a male viton lip seal which must be fitted into the inward bead of the liner; which is situated in the top half of the 2-piece adjustable pipe, and at the bottom of the liner on the 1-piece adjustable pipe.

Dimensions


The dimensions of the flue are:

Int Ø mm	100	125	150	180	200
Ext Ø mm	150	180	200	235	256

Finish

Paint - ICID Plus can be supplied painted in any RAL colour (additional costs apply)

Starting Components




Appliance Connector (Open)

DN8A047

Int Ømm	100	125	150	180	200
Ext Ømm	150	180	200	235	256
SAP Code Plain	147327	125307	126082	126827	127410
SAP Code Black	147328	125308	126079	126825	COA

This component MUST only be fitted to stove pipe and NOT directly to appliance.




Insulated Appliance Adaptor (Closed)

DN8A144

Int Ømm	100	125	150	180	200
Ext Ømm	150	180	200	235	256
A	97	123	148	177	198
SAP Code Plain	147329	125287	126060	126810	127393
SAP Code Black	147330	125288	126059	COA	COA


This component MUST only be fitted to stove pipe and NOT directly to appliance.



Insulated Appliance Connector

Int Ømm	100	125	150	180	200
Ext Ømm	150	180	200	235	256
A	97	123	148	177	198
SAP Code Plain	147406	146418	146419	146420	146421
SAP Code Black	147405	146414	146415	146416	146417

This component MUST only be fitted to stove pipe and NOT directly to appliance.




Insulated Increasing Adaptor

DN8A136

Int Ømm	100	125	150	180	200
Ext Ømm	150	180	200	235	256
A	-	98	123	148	178
B	-	100	118	116	116
C	-	50	50	50	50
SAP Code Plain	-	125305	126077	126824	127408
SAP Code Black	-	144438	126078	COA	COA

This component MUST only be fitted to stove pipe and NOT directly to appliance.




Uninsulated Increasing Adaptor

DN8A143

Int Ømm	100	125	150	180	200
Ext Ømm	150	180	200	235	256
A	-	98	123	148	178
SAP Code Plain	-	125320	125321	COA	COA
SAP Code Black	-	144439	125319	COA	COA

This component MUST only be fitted to stove pipe and NOT directly to appliance.

* used on appliances with rear outlet



Adaptor Prima Plus to ICID Plus


S027

Int Ømm	100	125	150	180	200
Ext Ømm	150	180	200	235	256
A	100	130	150	180	200
SAP Code Plain	152140	125688	126278	126967	127575

This component MUST only be fitted to stove pipe and NOT directly to appliance.

COA : Code on application

Starting Components (contd.)




Adaptor Prima Smooth to ICID Plus (Dry Applications only)

PS027

Int Ømm	100	125	150	180	200
Ext Ømm	150	180	200	235	256
SAP Code Plain	-	109992	110270	126981	127588
SAP Code Black	-	109991	110268	126980	127587


This component MUST only be fitted to stove pipe and NOT directly to appliance.



Double Wall Adjustable Starter Section (1037mm)

Int Ømm	100	125	150	180	200
Ext Ømm	150	180	200	235	256
SAP Code Plain	-	149644	149645	149646	149647
SAP Code Black	-	149648	149649	149650	149651


This component MUST only be fitted to stove pipe and NOT directly to appliance.



Double Wall Adjustable Starter Section (600mm)

Int Ømm	100	125	150	180	200
Ext Ømm	150	180	200	235	256
SAP Code Plain	-	152214	152215	152216	152217
SAP Code Black	-	152218	152219	152220	152221

This component MUST only be fitted to stove pipe and NOT directly to appliance.




Adaptor ICID Plus to Prima Plus

DN8A113

Int Ømm	100	125	150	180	200
Ext Ømm	150	180	200	235	256
A	132	132	132	134	134
SAP Code Plain	147331	125292	126062	126813	127396

This component MUST only be fitted to stove pipe and NOT directly to appliance.



Adaptor ICID Plus to Prima Smooth (Dry Applications only)

Int Ømm	100	125	150	180	200
Ext Ømm	150	180	200	235	256
A	-	132	132	134	134
SAP Code Plain	-	145516	145517	145518	145519

This component MUST only be fitted to stove pipe and NOT directly to appliance.




Adaptor ICID Plus to TecnoFlex Plus (Dry Applications only) (can not be used directly on stove) DN8A079

Int Ømm	100	125	150	180	200
Ext Ømm	150	180	200	235	256
SAP Code Plain	COA	125354	126132	126860	127443

This component MUST only be fitted to stove pipe and NOT directly to appliance.


COA : Code on application



Anchor Plate (Dry Applications only)* (can not be used directly on stove) DN8A0D6

Int Ømm	100	125	150	180	200
Ext Ømm	150	180	200	235	256
A	250	300	320	355	375
B	270	280	300	335	356
C	97	123	148	178	198
Flex Ømm	125	125	155	180	200
SAP Code Plain	-	125300*	126072*	126774*	127344*
SAP Code Flex	147336	142587	142595	142589	142590
SAP Code Flex Black	147337	142591	142596	142593	142594


This component MUST only be fitted to stove pipe and NOT directly to appliance.



SW-DW Stove Pipe Starter Section (Long) (Dry Applications only) DN8A152
Increasing SW-DW Stove Pipe Starter Section (Long)* (Dry Applications only) DN8A153

Int Ømm	100	125	125*	150	180	200
Ext Ømm	150	180	200	200	235	256
A	98	123	123	148	178	198
B	973	973	1018	973	973	973
SAP Code Plain	147332	125344	125345	126124	126854	127439
SAP Code Black	147333	125347	125348	126125	126855	-


This component MUST only be fitted to stove pipe and NOT directly to appliance.



SW-DW Stove Pipe Starter Section (Short) (Dry Applications only) DN8A149

Int Ømm	100	125	150
Ext Ømm	150	180	200
A	98	123	148
B	473	473	473
SAP Code Plain	147334	125349	126126
SAP Code Black	147335	125346	126123


This component MUST only be fitted to stove pipe and NOT directly to appliance.



SW-DW Adjustable Starter Section (Long) (Dry Applications only)

Int Ømm	100	125	150	180	200
Ext Ømm	150	180	200	235	256
A	-	123	148	178	198
B	-	1200	1200	1200	1200
SAP Code Plain	-	148503	148504	148505	148506
SAP Code Black	-	148507	148508	148509	148510

This component MUST only be fitted to stove pipe and NOT directly to appliance.



SW-DW Adjustable Starter Section (Short) (Dry Applications only) DN8A159
Increasing SW-DW Adjustable Starter Section* (Short) (Dry Applications only) DN8A161


Int Ømm	125	125*	150	180	200
Ext Ømm	180	200	200	235	256
A	123	123	148	178	198
B	352	434	352	352	352
SAP Code Plain	125340	126096	126118	126850	127435
SAP Code Black	125339	131148	126117	126849	127434

This component MUST only be fitted to Prima Smooth stove pipe and NOT directly to appliance.

COA : Code on application

Pipes


NOTE: Black product MUST not be connected directly to the stove.
refer to stove starting components



1460mm Effective Length

DN8A128


Int Ømm	100	125	150
Ext Ømm	150	180	200
SAP Code Plain	-	125253	126019
SAP Code Black	-	125251	126017



960mm Effective Length

DN8A001


Int Ømm	100	125	150	180	200
Ext Ømm	150	180	200	235	256
SAP Code Plain	147343	125285	126058	126808	127392
SAP Code Black	147338	125286	126056	126809	127388



750mm Effective Length

DN8A157

Int Ømm	100	125	150	180	200
Ext Ømm	150	180	200	235	256
SAP Code Plain	147347	125273	126045	126797	127380
SAP Code Black	147342	125274	126046	126798	127379



460mm Effective Length

DN8A002

Int Ømm	100	125	150	180	200
Ext Ømm	150	180	200	235	256
SAP Code Plain	147344	125269	126039	126793	127376
SAP Code Black	147339	125270	126037	126794	127372



293mm Effective Length

DN8A003


Int Ømm	100	125	150	180	200
Ext Ømm	150	180	200	235	256
SAP Code Plain	147345	125261	126030	126786	127362
SAP Code Black	147340	125262	126028	COA	127358



160mm Effective Length

DN8A004

Int Ømm	100	125	150	180	200
Ext Ømm	150	180	200	235	256
SAP Code Plain	147346	125258	126025	126784	127357
SAP Code Black	147341	125259	126023	COA	COA




Adjustable Pipe - 1 Piece 50-230mm

DN8A009

Int Ømm	100	125	150	180	200
Ext Ømm	150	180	200	235	256
SAP Code Plain	147351	125298	126071	126819	127402
SAP Code Black	147348	125294	126064	126815	COA

This item is converted for use on wet positive pressure applications by using the Lip Seal Kit for adjustable pipes - see page 4




Telescopic Pipe - 2 Piece 215-310mm

DN8A151

Int Ømm	100	125	150	180	200
Ext Ømm	150	180	200	235	256
SAP Code Plain	147352	125295	126066	126816	127399
SAP Code Black	147349	144441	126068	COA	COA

This item is converted for use on wet positive pressure applications by using the Lip Seal Kit for adjustable pipes - see page 4



Telescopic Pipe - 2 Piece 350-570mm

DN8A150

Int Ømm	100	125	150	180	200
Ext Ømm	150	180	200	235	256
SAP Code Plain	147353	125297	126069	126818	127401
SAP Code Black	147350	141888	126065	COA	127398

This item is converted for use on wet positive pressure applications by using the Lip Seal Kit for adjustable pipes - see page 4

COA : Code on application




Locking Band

DN8A083

Int Ømm	100	125	150	180	200
Ext Ømm	150	180	200	235	256
SAP Code Plain	147354	125330	126106	126842	127426
SAP Code Black	147355	125331	126107	COA	COA


Supplied as standard with all components with a female collar



Structural Locking Band

DN8A092


Int Ømm	100	125	150	180	200
Ext Ømm	150	180	200	235	256
SAP Code Plain	147356	125317	126092	126835	127419
SAP Code Black	147357	125318	126093	COA	COA



Inspection Pipe with Test Point (Dry Applications only)

Int Ømm	100	125	150	180	200
Ext Ømm	150	180	200	235	256
SAP Code Plain	-	148484	148485	148486	148487
SAP Code Black	-	148488	148489	148490	148491

This component incorporates a locking plug with a spring gasket suitable for high temperature T450 rated dry applications only




Inspection Pipe with Test Point (Condensing Applications only)

Int Ømm	100	125	150	180	200
Ext Ømm	150	180	200	235	256
SAP Code Plain	152142	148492	148493	148944	148945
SAP Code Black	152143	148496	148497	148498	148499

This component incorporates a locking plug with a lip seal gasket suitable for low temperature, max T200 rated applications only.

Tees




135° LongTee - Adjustable

(Dry Applications only)

??????

Int Ømm	125	150
Ext Ømm	180	200
A	336	365
B	259	283
C Min/Max	815/1193	841/1219
D Min/Max	576/844	844/862
SAP Code Plain	154662	154663
SAP Code Black	165664	154665



90° Tee including Drain Cap


(Dry Applications only)

DN8A135

Int Ømm	100	125	150	180	200
Ext Ømm	150	180	200	235	256
A	282	301	329	354	394
B	150	154	162	176	195
C	120	133	142	160	170
SAP Code Plain	147360	125282	126054	126805	127387
SAP Code Black	147359	125283	126055	COA	COA

COA : Code on application


Tees (contd.)



93° Tee including Drain Cap

(Condensing and Dry Applications)

Int Ømm	100	125	150	180	200
Ext Ømm	150	180	200	235	256
A	285	297	322	356	396
B	155	158	166	180	201
C	121	136	147	167	177
SAP Code Plain	151975	148110	148112	148114	148117
SAP Code Black	151976	151977	151978	151979	151980




135° Tee including Drain Cap

(Dry Applications only)

DN8A137

Int Ømm	100	125	150	180	200
Ext Ømm	150	180	200	235	256
A	325	336	365	414	444
B	254	259	283	326	351
C	254	259	283	326	351
SAP Code Plain	147364	125249	126015	126777	127347
SAP Code Black	147365	125250	126016	COA	131796



135° Tee including Drain Cap


(Condensing and Dry Applications)

Int Ømm	100	125	150	180	200
Ext Ømm	150	180	200	235	256
A	325	336	365	414	444
B	254	259	283	326	351
C	254	259	283	326	351
SAP Code Plain	147362	125248	126014	126776	127346
SAP Code Black	148363	COA	COA	COA	COA



Tee Plug


Int Ømm	100	125	150	180	200
Ext Ømm	150	180	200	235	256
SAP Code Plain	COA	125343	126121	126853	127438
SAP Code Black	COA	COA	126122	COA	COA



Tee Plug with Drain

DN8A138

Int Ømm	100	125	150	180	200
Ext Ømm	150	180	200	235	256
A	61	119	119	119	119
SAP Code Plain	147366	125312	126088	126831	127415
SAP Code Black	147367	144440	126089	COA	COA



Draught Stabiliser


Int Ømm	100	125	150	180	200
Ext Ømm	150	180	200	235	256
SAP Code Plain	-	138143	138145	149525	138147
SAP Code Black	-	COA	COA	COA	COA



Draught Stabiliser with Explosion Relief

Int Ømm	100	125	150	180	200
Ext Ømm	150	180	200	235	256
SAP Code Plain	-	149521	138148	138144	149526
SAP Code Black	-	COA	COA	COA	COA

Bends




15° Bend

DN8A018

Int Ømm	100	125	150	180	200
Ext Ømm	150	180	200	235	256
A	60	63	63	63	64
B	56	55	56	56	57
SAP Code Plain	147372	125256	126022	126782	127353
SAP Code Black	147368	125254	126020	COA	COA


COA : Code on application



30° Bend

DN8A019

Int Ømm	100	125	150	180	200
Ext Ømm	150	180	200	235	256
A	63	66	70	73	77
B	59	57	61	64	68
SAP Code Plain	147373	125264	126033	126788	127366
SAP Code Black	147369	144442	126031	COA	COA



45° Bend

DN8A017


Int Ømm	100	125	150	180	200
Ext Ømm	150	180	200	235	256
A	76	79	83	91	95
B	74	70	74	82	86
SAP Code Plain	147374	125267	126036	126791	127371
SAP Code Black	147370	125265	126034	126789	127367



Structural Locking Band for Bends

DN8A155


Int Ømm	100	125	150	180	200
Ext Ømm	150	180	200	235	256
A	56	56	56	56	56
SAP Code Plain	147376	125342	126120	126852	127437
SAP Code Black	147377	125341	126119	126851	127436



90° Bend


DN8A015

Int Ømm	100	125	150	180	200
Ext Ømm	150	180	200	235	256
A	131	146	156	174	184
B	122	137	147	165	175
SAP Code Plain	147375	125277	126049	126800	127382
SAP Code Black	147371	125275	126047	COA	COA



87° Bend

Int Ømm	100	125	150	180	200
Ext Ømm	150	180	200	235	256
A	125	141	151	169	179
B	122	138	147	164	175
SAP Code Plain	151971	148023	148024	148025	148026
SAP Code Black	151972	148201	148202	151973	151974




90° Inspection Bend (Dry Systems only)

DN8A0A2

Int Ømm	100	125	150	180	200
Ext Ømm	150	180	200	235	256
A	-	184	194	209	219
B	-	139	149	164	174
SAP Code Plain	-	125280	126052	126803	127385
SAP Code Black	-	COA	COA	COA	COA

Typical Offsets (made by assembling 2 bends)




15° Offset

Int Ømm	100	125	150	180	200
Ext Ømm	150	180	200	235	256
A	228	232	234	234	238
B	30	31	31	31	31

COA : Code on application


Typical Offsets (made by assembling 2 bends) (cont.)

30° Offset



Int Ømm	100	125	150	180	200
Ext Ømm	150	180	200	235	256
A	228	230	244	256	271
B	61	62	66	69	73


45° Offset



Int Ømm	100	125	150	180	200
Ext Ømm	150	180	200	235	256
A	256	254	268	295	309
B	106	105	111	122	128


Typical Offsets (made by assembling 2 bends and a standard pipe section)

15° Bend offset with Standard Pipe Length




Int Ømm	100	125	150	180	200
Ext Ømm	150	180	200	235	256
1460	A	-	1642	1644	1648
Effective Pipe	B	-	408	409	409
960	A	1155	1159	1161	1165
Effective Pipe	B	278	279	279	280
750	A	952	956	958	962
Effective Pipe	B	224	225	225	225
460	A	672	676	678	682
Effective Pipe	B	149	150	150	150
293	A	511	515	517	521
Effective Pipe	B	106	106	107	107
160	A	383	387	388	392
Effective Pipe	B	71	72	72	73

30° Bend offset with Standard Pipe Length




Int Ømm	100	125	150	180	200
Ext Ømm	150	180	200	235	256
1460	A	-	1494	1509	1535
Effective Pipe	B	-	792	796	803
960	A	1059	1061	1076	1102
Effective Pipe	B	541	542	546	553
750	A	877	879	894	920
Effective Pipe	B	436	437	441	448
460	A	626	628	643	669
Effective Pipe	B	291	292	296	303
293	A	481	483	498	524
Effective Pipe	B	208	208	212	219
160	A	366	368	383	409
Effective Pipe	B	141	142	146	153

45° Bend offset with Standard Pipe Length




Int Ømm	100	125	150	180	200
Ext Ømm	150	180	200	235	256
1460	A	-	1287	1300	1341
Effective Pipe	B	-	1138	1143	1160
960	A	935	933	947	988
Effective Pipe	B	785	784	790	807
750	A	786	785	798	839
Effective Pipe	B	636	636	641	658
460	A	581	580	593	634
Effective Pipe	B	431	431	436	453
293	A	463	462	475	516
Effective Pipe	B	313	313	318	335
160	A	369	367	381	422
Effective Pipe	B	219	218	224	241



Offsets for 135° Tee and 45° Bend

Int Ømm	100	125	150	180	200
Ext Ømm	150	180	200	235	256
A	383	402	435	497	532
B	303	310	334	376	402



Offsets for 135° Tee and 45° Bend

Int Ømm	100	125	150	180	200
Ext Ømm	150	180	200	235	256
A	232	233	252	288	309

Firestop Components


Combustible Floor

Round Ventilated Firestop Plate - 1 Piece*

9423

Round Ventilated Firestop Plate - 2 Piece

9424




Int Ømm	100	125	150	180	200
Ext Ø	150	180	200	235	256
A	153	183	203	241	259
B	350	380	400	430	450
SAP Code 1PC Plain	125902	126661	127227	128117	128601
SAP Code 1PC Black	125900	126659	127225	128115	128599
SAP Code 1PC White	125901	126660	127226	128116	128600
SAP Code 2PC Plain	125905	126664	127230	128120	128604
SAP Code 2PC Black	125903	126662	127228	128118	128602
SAP Code 2PC White	125904	126663	127229	128119	128603


*One piece firestop available for use exclusively with stove starter pipe

Magnetic Firestop Cover Plate Kit

9509



Int Ømm	100	125	150	180	200
Ext Ømm	150	180	200	235	256
A	154	183	203	241	259
B	370	380	400	430	450
SAP Code Plain	147378	126945	127552	128127	128611
SAP Code Black	147379	126946	127553	128128	128612
SAP Code White	147380	126947	127554	128129	128613




Combustible Floor

Ventilated Support Plate - 2 Piece

95260

Rectangular Ventilated Firestop Plate - 2 Piece

94250




Int Ømm	100	125	150	180	200
Ext Ømm	150	180	200	235	256
A	153	183	203	241	259
B	350	380	400	430	450
C	175	190	200	215	225
SAP Code Support Plate	125908	126667	127234	128124	128607
SAP Code Firestop Plate	125907	126666	127232	128122	128606

Firestop Components (cont.)

Non Combustible Floor Firestop Plate


94670



Int Ømm	100	125	150	180	200
Ext Ømm	150	180	200	235	256
A	300	450	450	450	610
B	250	280	300	338	356
SAP Code Plain	I25891	I26624	I27200	I28099	I28584

Non Combustible Floor Support Plate

95680



Int Ømm	100	125	150	180	200
Ext Ømm	150	180	200	235	256
A	300	330	350	388	406
B	250	280	300	338	356
SAP Code Plain	I25896	I26646	I27210	I28107	I28591


Bungalow Firestop Kits

All Unventilated Bungalow Firestop Kits may only be used on a combustible ceiling in a bungalow where there is a minimum 60mm distance to combustibles where the chimney penetrates the ceiling area and where the roof space above the ceiling is open and ventilated. Within the roof space, a protective wire mesh framework must be built around the chimney to ensure the minimum 60mm distance to combustibles is maintained.

Unventilated

Bungalow Round Firestop Plate - 1 Piece

9428




Int Ømm	100	125	150	180	200
Ext Ø	150	180	200	235	256
A	153	183	203	241	259
B	350	380	400	430	450
SAP Code Plain	I47381	I26526	I27108	I28084	I28571
SAP Code Black	I47382	I26528	I27110	I28086	I28572
SAP Code White	I47383	I26529	I27111	I28087	I28573

Unventilated

Bungalow Round Firestop Plate - 2 Piece

9429




Int Ømm	100	125	150	180	200
Ext Ø	150	180	200	235	256
A	153	183	203	241	259
B	350	380	400	430	450
SAP Code Plain	I47384	I26527	I27109	I28085	I31123
SAP Code Black	I47385	I31122	I27106	COA	COA
SAP Code White	I47386	COA	I27107	COA	COA

Unventilated

Bungalow Square Firestop Plate - 1 Piece


9430



Int Ømm	100	125	150	180	200
Ext Ømm	150	180	200	235	256
A	-	183	203	241	259
B	-	380	400	430	450
SAP Code Plain	-	I27015	I27619	COA	COA
SAP Code Black	-	I27016	I27620	COA	COA
SAP Code White	-	COA	COA	COA	I28614

COA : Code on application


Support Components



Top Plate

DN8A0D3


Int Ømm	100	125	150	180	200
Ext Ømm	150	180	200	235	256
A	266	276	296	334	352
B	247	287	307	342	363
C	127	142	152	170	180
D	106	106	106	105	108
SAP Code Plain	147387	125140	125833	126572	127151
SAP Code Black	147388	125141	125834	COA	COA



Wall Support Side Plates

DN8A0D2

Int Ømm	100	125	150	180	200
Ext Ømm	150	180	200	235	256
B	235	275	295	325	345
C	165	160	180	210	230
D	470	470	470	470	470
E	100	100	100	100	100
SAP Code Plain	101043	125357	126136	126862	127445
SAP Code Black	COA	125355	126133	COA	COA




Cantilever Support

Type 325 - 95420001
Type 475 - 95420002

Type	325	475
Int Ømm Range	100 - 150	100 - 200
A	325	475
B	242	242
SAP Code Plain	101742	101743
SAP Code Black	130686	130687

Used in combination with Adjustable Top Plate.




Cantilever Support

Type 570 - 95420003

Type	570
Int Ømm Range	100 - 200
A	570
B	330
SAP Code Plain	101744
SAP Code Black	130688


Used in combination with Adjustable Top Plate.



Retrofit Wall Band

95600


Int Ømm	100	125	150	180	200
Ext Ømm	150	180	200	235	256
A	136	151	161	180	189
B	300	330	350	388	406
SAP Code Plain	147389	126657	127223	128113	128597
SAP Code Black	147390	126658	127224	128114	128598



Wall Band (60mm)

92930

Int Ømm	100	125	150	180	200
Ext Ømm	150	180	200	235	256
A	148	180	200	238	256
B	135	140	150	168	178
SAP Code Plain	125898	126648	127213	128110	128594
SAP Code Black	131170	126620	127196	128095	128580




Adjustable Back Bracket for Wall Band 60-300mm

95950

Int Ømm	100	125	150	180	200
Ext Ømm	150	180	200	235	256
A	83	112	132	162	186
SAP Code Plain	125890	126623	127199	128098	128583
SAP Code Black	COA	126622	127198	128097	128582

COA : Code on application

Support Components (contd.)




Structural Wall Band (50mm)


95430

Int Ømm	100	125	150	180	200
Ext Ømm	150	180	200	235	256
A	126	144	164	194	214
B	55	55	55	55	55
SAP Code Plain	101264	101265	101266	128112	128596
SAP Code Black	COA	126654	127218	COA	COA

Type WI



Types LI, L2




Structural and
Retrofit Wall Band
Extensions

WI - 95440001
LI - 95440004
L2 - 95440005

Type	WI	LI	L2
Adj.	55 - 100	100 - 250	100 - 440
A	130	300	450
B	36	-	-
C	-	32	32
SAP Code Plain	101735	143846	143847
SAP Code Black	130824	144655	144656


Ceiling Joist Support
Arms (Pair)

9459001



Type	570
Int Ømm Range	125 - 200
A	39
B	700
SAP Code Plain	130694


Used in combination with
Ceiling Joist Support.



Ceiling Joist Support

94590


Int Ømm	100	125	150	180	200
Ext Ømm	150	180	200	238	256
A	291	321	341	379	397
SAP Code Plain	147391	126669	127238	128125	128609



Roof Support

94640


Int Ømm	100	125	150	180	200
Ext Ømm	150	180	200	235	256
SAP Code Plain	100961	100962	100963	128126	128610



Guy Wire Bracket

95900


Int Ømm	100	125	150	180	200
Ext Ømm	150	180	200	235	256
SAP Code Plain	100640	100641	100642	128101	128586
SAP Code Black	COA	131808	127202	COA	COA



Wall Sleeve 90°

Masonry - 94980
Timber Frame - 94810

Int Ømm	100	125	150	180	200
Ext Ømm	150	180	200	235	256
A Masonry	200	230	250	288	306
A Timber F	270	300	320	358	376
SAP Code Masonry	147392	126642	127206	COA	COA
SAP Code Timber F	125897	126647	127212	128108	128592




Wall Sleeve 45°

Masonry - 94620
Timber Frame - 94910

Int Ømm	100	125	150	180	200
Ext Ømm	150	180	200	235	256
A Masonry	200	230	250	288	306
A Timber F	270	300	320	358	376
SAP Code Masonry	125894	126641	127205	128102	128587
SAP Code Timber F	125895	126643	127207	128103	128588

Supplied as a 1m long mitred tube to be cut to length on site

COA : Code on application



1 Piece Trim Collar 90°

9580


Int Ømm	100	125	150	180	200
Ext Ømm	150	180	200	235	256
A	154	184	204	242	260
B	300	330	350	388	406
SAP Code Plain	COA	127038	127642	128133	128618
SAP Code Black	126337	127039	127643	128134	128619



2 Piece Trim Collar 90°

9599


Int Ømm	100	125	150	180	200
Ext Ømm	150	180	200	235	256
A	154	184	204	242	260
B	300	330	350	388	406
SAP Code Plain	126338	127040	127644	COA	COA
SAP Code Black	126339	127041	127645	COA	COA



1 Piece Trim Collar 45°

9589


Int Ømm	100	125	150	180	200
Ext Ømm	150	180	200	235	256
A	154	184	204	242	260
B	216	259	287	341	366
C	300	330	350	388	406
D	412	454	483	536	562
SAP Code Plain	147393	126612	127186	128089	128575
SAP Code Black	147394	126613	127187	128090	128576
SAP Code White	147395	126614	127188	128091	128577



2 Piece Trim Collar 45°

9579

Int Ømm	100	125	150	180	200
Ext Ømm	150	180	200	235	256
A	154	184	204	242	260
B	108	130	144	171	183
C	300	330	350	388	406
D	206	227	242	268	281
SAP Code Plain	126335	127035	127639	128130	128615
SAP Code Black	126336	127036	127640	128131	128616
SAP Code White	COA	127037	127641	128132	128617




Adjustable Trim Collar 35-45°

Int Ømm	100	125	150	180	200
Ext Ømm	150	180	200	235	256
A	-	187	204	242	260
B	-	364	384	422	440
C	-	204.5	214.5	238.5	247.5
SAP Code Plain	-	126513	127093	128071	128558
SAP Code Black	-	126511	127091	128069	128556
SAP Code White	-	126512	127092	128070	128557


COA : Code on application

Support Components (contd.)



Adjustable Trim Collar 0-20°


Int Ømm	100	125	150	180	200
Ext Ømm	150	180	200	235	256
A	-	187	204	242	260
B	-	364	384	422	440
C	-	204.5	214.5	238.5	247.5
SAP Code Plain	-	126507	127087	128065	128552
SAP Code Black	-	126505	127085	128063	128550
SAP Code White	-	126506	127086	128064	126512



Adjustable Trim Collar 20-35°

Int Ømm	100	125	150	180	200
Ext Ømm	150	180	200	235	256
A	-	187	204	242	260
B	-	364	384	422	440
C	-	204.5	214.5	238.5	247.5
SAP Code Plain	-	126510	127090	128068	128555
SAP Code Black	-	126508	127088	128066	128553
SAP Code White	-	128067	127089	128067	128554

Loft Guard



Loft Guard

Int Ømm	100	125	150	180	200
Ext Ømm	150	180	200	235	256
Ø A	-	300	320	350	376
SAP Code	-	137464	137464	137465	137465


Pass Through Systems (for timber framed and air tight houses)

Ignis-Protect (for air tight wall penetration)



IGNIS-PROTECT 90° Version

SAP Code	Thickness (mm)	Height (mm)	Width (mm)	Pallet Quantity
I01841	150	700	565	12
I01842	200	700	565	9
I01843	250	700	565	6
I01844	300	700	565	4
I01845	350	700	565	4
I01846	400	700	565	2




IGNIS-PROTECT 45° Version

SAP Code	Thickness (mm)	Height (mm)	Width (mm)	Pallet Quantity
I49530	100	1020	565	18
I49531	150	1020	565	12
I49532	200	1020	565	9
I49533	250	1320	565	6
I49534	300	1320	565	4
I49535	350	1320	565	4
I49536	400	1320	565	2
I44032	450	1320	565	2
I44033	466	1320	565	2
I44034	500	1320	565	2

COA: code on application

For more information on IGNIS-PROTECT 90° and 45° please refer to p.26

Protect Box and Accessories (for air tight ceiling/roof penetration)




Protect Box

SAP Code	I21342
----------	--------



EPDM Seal

SAP Code	I36939
----------	--------




ICID Plus - ICS50 Adaptor


Int Ømm	125	150
Ø A	180	201
Ø B	251	251
C	195	195
SAP Code Plain	I48921	I48919
SAP Code Black	I48922	I48920

For more information on PROTECT BOX please refer to p.27


Typical Installations

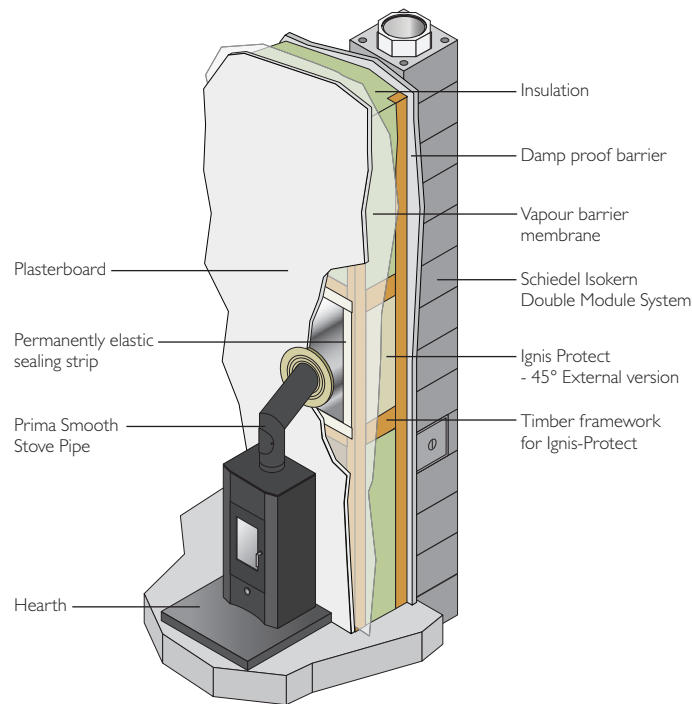


**IGNIS-PROTECT
45° VERSION**

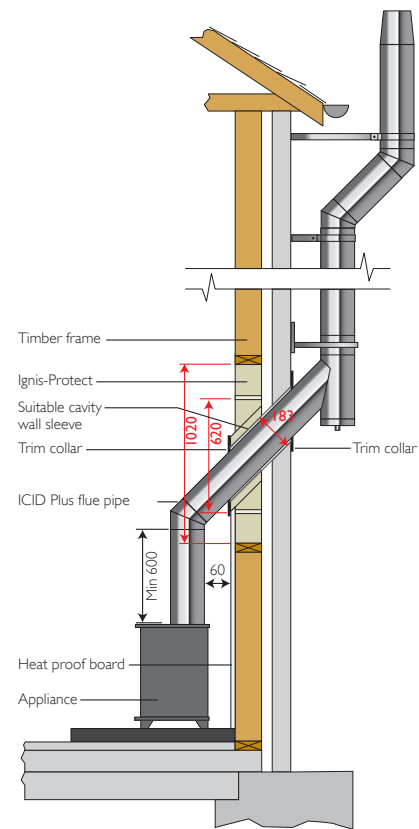

**IGNIS-PROTECT
ICID PLUS ON TRADITIONAL TIMBER FRAME WALL**

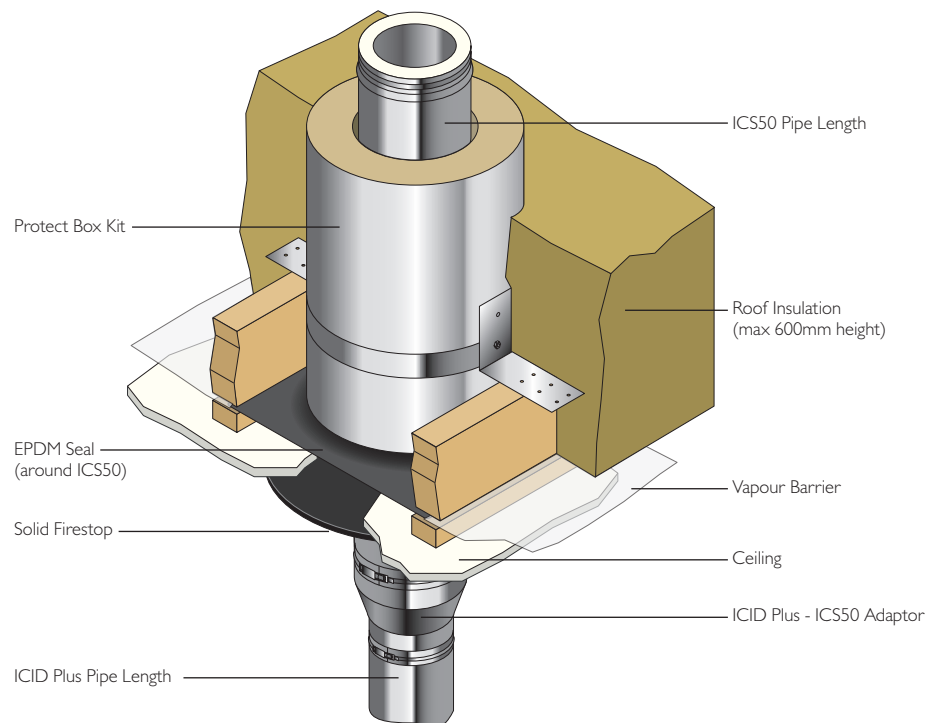

**PROTECT BOX
IN SITU**

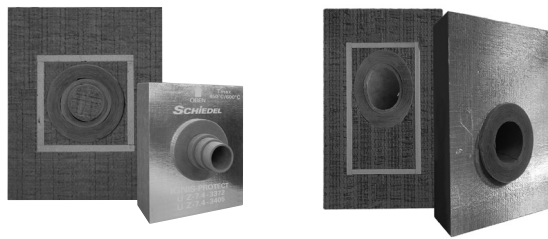

Ignis-Protect




IMPORTANT!

Window and door lintels and their support areas, as well as other bearing elements must not be weakened!

In case of uncertainty consult a structural engineer.



1. Clear installation width required 565mm.

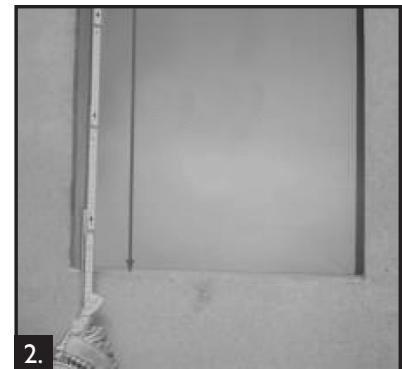

2. Clear installation height of 700mm on 90° version, 1020mm on 45° version for walls between 100 - 200mm thick, and height 1320mm on walls between 250 - 500mm thick.




TIP:

The dimensions of the IGNIS-PROTECT wall bushings have already been matched to the standard centre-to-centre dimensions of wooden stud walls!



3. Remove plasterboard.
NOTE: The vapour barrier must not be damaged!

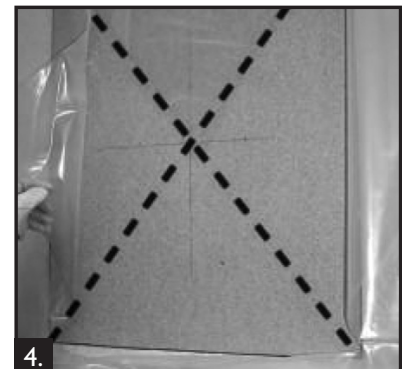

4. Cut a cross shape in the vapour barrier to the required dimensions of the opening (see figs. 1. and 2.)



5. Make the opening. **NOTE: Bearing elements must not be weakened!**
IMPORTANT: follow the safe working notes on page 29.




6. Remove wood fibre board, thermal insulation etc. from the assembly opening.



7. Install the wooden surround for Ignis-Protect into the studwork.



8. Check width of the opening: 565mm
NOTE: Ignis-Protect must not be shortened on site!

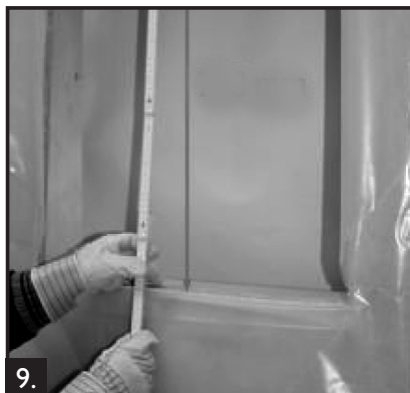

9. Check height of the opening (see image 2.) **NOTE: Ignis-Protect must not be shortened on site!**



10. If necessary correct the opening. Replace the thermal insulation right around the assembly opening in the studwork. **IMPORTANT: follow the safe working notes on page 29.**



11. Open up the exterior wall.



12. Insert Ignis-Protect so that it fits perfectly. The side laminated with foil should be facing inwards!



13. With Ignis-Protect in place, cut away the vapour barrier flush to the edges.




14. Secure the junctions with the vapour barrier by applying appropriate sealing tape to the foil lamination.



15. View of the finished vapour barrier sealed tightly all round.

Ignis-Protect (contd.)

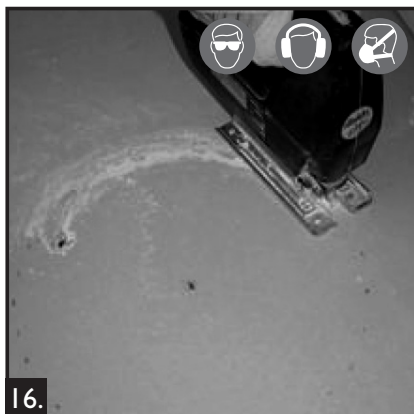

16. Cut a hole in the thermal board to fit the Ignis-Protect outer protection pipe. **IMPORTANT:** follow the safe working notes on page 29.



17. Replace the prepared thermal board.
NOTE: The vapour barrier must not be damaged!



TIP:

The Ignis-Protect inner protection pipe and the outer protection pipe are basically designed for 24mm wall planking!



18. If necessary, shorten the inner and outer protection pipes to be flush with the wall. **IMPORTANT:** follow the safe working notes on page 29.




19. By pulling out the corresponding inner protection pipes and the assembly cap (A) the connection size is adapted to fit the required connecting pipe or transition piece.



TIP:

The inner protection pipes and the assembly cap (A) remain in place until the stove connection pipe is in its final position in the Ignis-Protect.

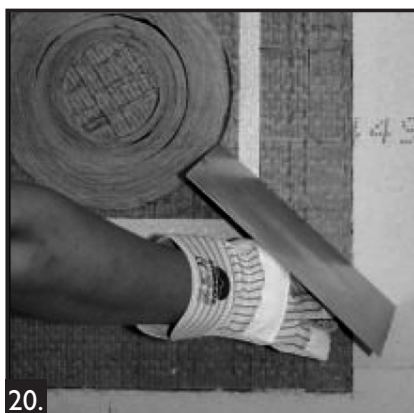

20. Check that the thermal insulation is flush with the wall.



IMPORTANT!


Follow the preparation guidelines and relevant drying times of the render system manufacturer!







21. Application of render over the whole surface. **NOTE:** do not render over the inner protection pipe!

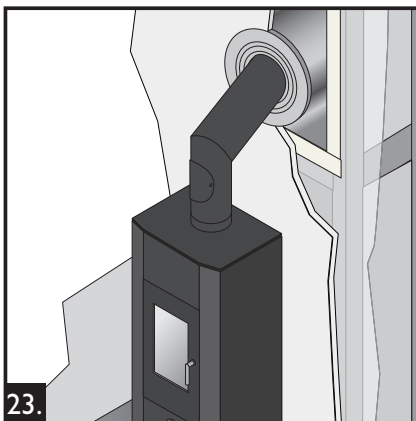

22. Example of a design with a double-walled connecting flue pipe.



23. Finished installation.

 <p>Protection measures are required when cutting and drilling. Wet-cutting or dust extraction should be used.</p>		<h3>HEALTH & SAFETY INSTRUCTION</h3> <p>Many building products, including chimney elements are manufactured using natural raw materials which contain proportions of crystalline quartz.</p> <p>During the mechanical processing of products, such as cutting and drilling, quartz dust is released which can get into the lungs.</p> <p>With higher levels of exposure over longer periods this may result in damage to the lungs (silicosis) and as a consequence of the silicosis disease, to an increased risk of lung cancer.</p>	
 <p>Eye Protection</p>	 <p>P3/FFP3 Respiratory Protection Mask</p>		<h3>THE FOLLOWING PROTECTIVE MEASURES ARE TO BE TAKEN</h3> <ul style="list-style-type: none"> • When cutting and drilling, a P3/FFP3 respiratory protection mask is to be worn. • In addition, wet-cutting equipment or equipment with dust extraction should be used.
 <p>Ear Protection</p>			

HAZARDS FOR PEOPLE AND THE ENVIRONMENT

Mineral wool insulation materials in this group of products can release fine fibres which may have carcinogenic effects in the lungs. If inhaled, fibres can get into the body and cause damage to health. Larger fibres or fragments of fibres can cause irritation (itching) of the skin, the upper airways and the eyes!

PROTECTION MEASURES AND SAFE PRACTICE

Avoid contact with the skin!

After finishing work, rinse off dust with water and change your clothes. wash exposed areas of skin thoroughly with soap and if necessary use a skin care product!



Eye Protection:

When working overhead and where large amounts of dust are produced, wear goggles with side protection.



Hand Protection:


Protective gloves, e.g. in leather or nitrile-coated cotton.



Breathing:

For low-level activities (exposure category E1/E2) the use of half or quarter masks with P2 filters (white) or FFP2 particle filtering half masks is recommended.


Flashings



Angled Flashing Kit 5° - 45°

95510


Int Ømm	100	125	150	180	200
Ext Ømm	150	180	200	235	256
A	610	610	700	700	800
SAP Code Plain	125889	126621	127197	128088	128574
SAP Code Black	COA	COA	130662	COA	COA



Flat Flashing Kit


95530

Int Ømm	100	125	150	180	200
Ext Ømm	150	180	200	235	256
A	610	610	610	610	610
SAP Code Plain	125892	126625	127201	128100	128585
SAP Code Black	COA	COA	131807	COA	COA



Storm Collar

Int Ømm	100	125	150	180	200
Ext Ømm	150	180	200	235	256
SAP Code Plain	106138	106140	106141	128106	128590
SAP Code Black	COA	126645	127209	128105	COA




Uniflash

Product Code	94540001	94540002
Ext Ømm	80 - 100	150 - 300
A	500	685
SAP Code	112198	112197

Universal EPDM rubber/aluminium flashing. Just pull the required diameter tab on the rubber seal.


Terminals



Raincap

with 10mm sparkguard DN8A145


Int Ømm	100	125	150	180	200
Ext Ømm	150	180	200	235	256
A	266	266	310	362	362
B	70	90	90	90	115
SAP Code Plain	147397	125336	126112	126846	127430
SAP Code Black	147398	COA	COA	COA	COA



Raincap

with 25mm anti-bird mesh DN8A140

Int Ømm	100	125	150	180	200
Ext Ømm	150	180	200	235	256
A	266	266	310	362	362
B	70	90	90	90	115
SAP Code Plain	147399	125337	126113	126847	127431
SAP Code Black	147400	125335	126115	126845	127432




Raincap

without mesh DN8A142

Int Ømm	100	125	150	180	200
Ext Ømm	150	180	200	235	256
A	266	266	310	362	362
B	70	90	90	90	115
SAP Code Plain	147401	125144	125837	126574	127153
SAP Code Black	147402	125145	125839	126575	COA


COA : Code on application

Terminals (contd.)



Anti-splash Anti-downdraught Terminal (Gastec Approved)

Int Ømm	100	125	150	180	200
Ext Ømm	150	180	200	230	250
A	-	142	170	204	204
B	-	254	304	354	404
SAP Code with mesh Plain	-	I25302	I26074	I26821	I27405
SAP Code with mesh Black	-	COA	COA	COA	COA
SAP Code without mesh Plain	-	I25303	I26075	I26822	I27406
SAP Code without mesh Black	-	I25301	I26073	COA	I31797



Insulated Tapered Terminal


DN8A038

Int Ømm	100	125	150	180	200
Ext Ømm	150	180	200	235	256
A	204	200	200	204	240
SAP Code Plain	I47403	I25351	I26130	I26857	I27441
SAP Code Black	I47404	I25352	I26129	I26858	COA

COA : Code on application


Distance to Combustibles on high temperature (T450) applications (see p.24)

Fig. 1

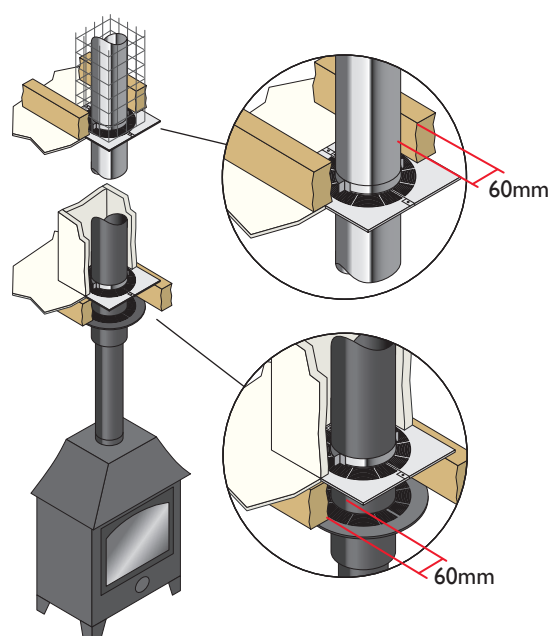

INTERNAL HOUSE
Combustible Floors

Fig. 2

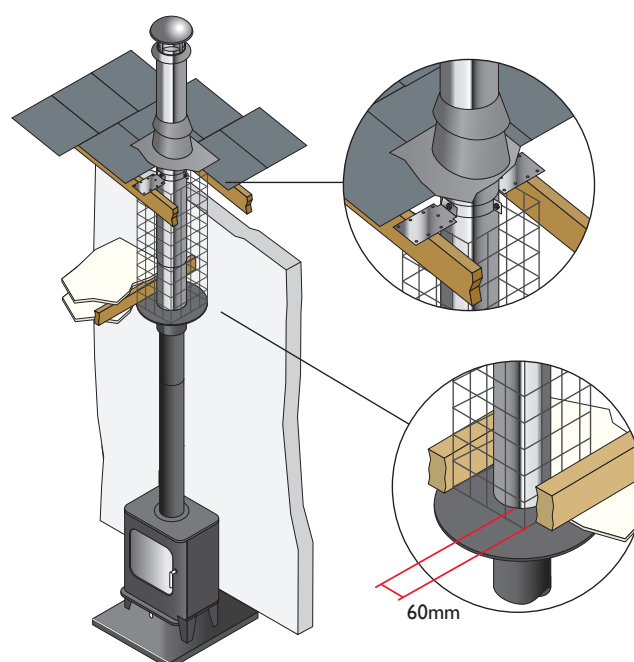

INTERNAL BUNGALOW (VENTILATED LOFT SPACE)
Combustible and Non-Combustible Floors

System Design

OUTLET SITING

Flue terminations for solid fuel & oil are subject to EN15287-1 2007. Figures A and B illustrate recommendations for the most commonly encountered outlet terminations. Flue terminations for gas in domestic situations are governed by the BS5440-1 2008 Section 4.2. Figure C illustrates recommendations for the most common siting situations encountered. Adjacent taller structures may require increased height. The minimum flue projection through the roof is 600mm to the underside of the terminal.

LOCATION OF OUTLET

Fig. A

Outlet siting for Oil Appliances (<45kW)





Fig. B

Outlet siting for Solid Fuel Appliances (<50kW)



Outlet siting for Oil Appliances (<45kW)

Location of outlet	Pressure Jet Burner	Vapourising Burner
M Above the highest point of an intersection with the roof	600mm	1000mm
N From a structure to the side of the terminal	750mm	2300mm
O Above a vertical structure which is less than 750mm (pressure jet burner) or 2300mm (vapourising burner) horizontally from the side of the terminal	600mm	1000mm
P From a ridge terminal to a vertical structure on the roof	1500mm	Should not be used

FLUE ROUTING

The chimney should remain as straight as possible through its vertical run to assist flow. Should it be necessary to offset a chimney run the following guidelines should be adhered to:

It is recommended that a vertical rise of 600mm should be allowed immediately above the appliance before any change of direction.

Within a system, on all fuels, there should be no more than 4 changes of direction of maximum 45°.

90° Factory made bends or tees within the system may be treated as being equal to two 45° bends (see Document J of the Building Regulations issued October 1st 2010).

TERMINAL TYPES

On solid fuel appliances, an open termination is normally recommended. However in certain conditions, rain caps or anti-downdraught terminals may be used.

Rain caps and anti-downdraught terminals are available in two versions, with mesh/spark guard and without mesh. Where a terminal with mesh is used, there is a risk of soot build up, and therefore regular cleaning is required to avoid blockage, particularly when using oil or solid fuel.

PROVISION FOR SWEEPING, CLEANING AND MAINTENANCE

Provision should be made for inspecting and cleaning the chimney. To aid cleaning, sufficient distance should be left between changes of direction to permit the safe passage of cleaning brushes within the system. This is particularly important on solid fuel applications. It is recommended that chimneys serving solid fuel appliances be swept as frequently as necessary but at least twice a year. Choose an access component suitable for your installation unless cleaning/inspection can be done through the appliance.


Outlet siting for Solid Fuel Appliances (<50kW)

Point where flue passes through weather surface (Notes 1, 2)	Clearance to flue outlet
A At or within 600mm of the ridge	At or within 600mm above the ridge
B Elsewhere on the roof (whether pitched or flat)	At least 2300mm horizontally from the nearest point on the weather surface and: a) at least 1000mm above the highest point of intersection of the chimney and the weather surface; or b) at least as high as the ridge
C Below (on a pitched roof) or within 2300mm horizontally to an openable rooflight, dormer window or other opening (Note 3)	At least 1000mm above the top of the opening
D Within 2300mm of an adjoining or adjacent building, whether or not beyond the boundary (Note 3)	At least 600mm above any part of the adjacent building within 2300mm

1. The weather surface is the building external surface, such as its roof, tiles or external walls.
2. A flat roof has a pitch less than 10°.
3. The clearance for A or B, as appropriate, will also apply.
4. A vertical flue fixed to an outside wall should be treated as equivalent to an inside flue emerging at the nearest edge of the roof.

Fig. C

BS 5440-1 Outlet siting for Gas Appliances (<70kW)

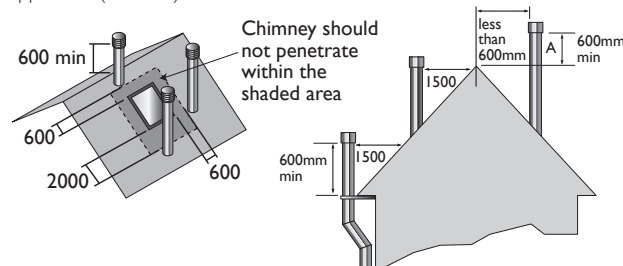

ROOM VENTILATION

The room carrying the appliance should have an air vent either direct to an external air source or vented into a room that has an external vent direct to an air source. This is required to provide adequate air supply to allow the appliance and flue to operate efficiently. These requirements are specified in the Building Regulations (Document J) also by CIBSE and BS5440.

COMMERCIAL INSTALLATIONS

Schiedel Rite-Vent can provide a full design & flue sizing advice service for commercial installations, using both ICID Plus and our ICS product ranges.

PROVISION FOR CONDENSATE DISPOSAL

(subject to appliance manufacturer recommendations)

Normally solid fuel and atmospheric gas and oil appliances will not need a drain unless rain ingress is significant. Most condensing appliances however need provision for drainage. As a rule of thumb a condensing boiler produces 1 to 1.5 litres of condensate per hour per 10kW of input.

This is a significant amount of acidic liquid which must be drained from the system. Choose appropriate flue drainage components, normally fitted at the base of the stack and close to the appliance outlet.

On high efficiency or on condensing systems, a 3° slope on horizontal runs is advised, using the appropriate 87° bend and 93° tee.

Installation

These notes should be read in conjunction with the detailed ICID Plus Installation Instructions.

MANDATORY REQUIREMENTS

Connection to an appliance that is connected to the fuel supply must be carried out by a GAS SAFE (gas) or OFTEC (oil) registered installer. We recommend the use of HETAS approved installers for solid fuel applications. For full design and installation details the key referral documents are:

- BS EN 1856-1: Chimneys - System Chimney Products
- BS EN 1859: Metal Chimneys - Testing Methods
- BS EN 1443: Chimneys - General Requirements
- BS EN 15287-1: Chimneys. Design, installation and commissioning of chimneys. Chimneys for non-roomsealed heating appliances.
- BS 5440-1: Fluing and ventilation for gas appliances of rated input not exceeding 70kW net (1st, 2nd and 3rd family gases) Specification for installation of gas appliances to chimneys and for maintenance of chimneys.
- Approved Document J: - Combustion appliances and fuel storage systems (England & Wales)
- DFP Technical Booklet L: - Combustion appliances and fuel storage systems (NI)
- Technical Handbook (Domestic & Non Domestic), Section 3 - Environment (Scotland)
- Appliance Installation Instructions and related standards.

Other standards covering specific applications will also be relevant and must be adhered to.

Planning permission may be required, and reference should be made to the local Building Control Department.

ENCLOSURE/SHAFTS

With the exception of the room containing the appliance, where the chimney passes through any part of the building, where there is a risk of accidental human contact, i.e a bedroom etc., or where there is a risk of contact with combustible materials stored in a cupboard or in the roof-space, the chimney must be enclosed in an appropriate way to meet Building Regulations. This can be achieved by boxing in the chimney in habitable rooms, or by the use of a protective wire mesh frame in roof spaces etc. In all cases the minimum distance to any combustible material, including loft insulation, must be respected according to the table on p.2, and any enclosure should be ventilated using the appropriate ventilated fire stops (see p.13 - 14).

DISTANCE TO COMBUSTIBLES

In accordance with building regulations it is essential that the correct distance to combustible material is maintained. On solid fuel applications, where there is a risk of soot fire, a distance of 60mm to combustibles must be maintained within a combustible floor and within a combustible shaft (see Fig.1 p.22). There is no need to line the area within the floor cavity with plasterboard; however the ventilated fire stop plate and ventilated support plate must be used.

On gas and oil applications, a distance of 50mm to combustibles must be maintained within a combustible floor and within a combustible shaft. The ventilated fire stop plate and ventilated support plate must be used.

Where the chimney penetrates a non combustible floor and where a non combustible shaft is used, a distance of 50mm to the shaft is sufficient. In this case, non ventilated fire stops and non ventilated support plates may be used at first floor level with a ventilated fire stop being used where the chimney penetrates into the roof space.

On bungalow applications where the chimney runs through either a combustible or non-combustible ceiling, an unventilated bungalow fire stop plate kit can be used. Please note that an unventilated support plate can not be used above the ceiling in this case. The weight of the chimney should be supported using the roof support (see p.16). Distance to combustibles must be respected within the ceiling space (see Fig. 2 p.22) and mesh frame should be used within the loft space, which must be ventilated (see Fig. 2 p.22).

JOINTING SYSTEM

All joints in the ICID Plus chimney range, which require a locking band, are made by means of a simple twist lock jointing method. This is achieved by pushing together the male and female collars on each end of the main chimney components and twisting the components through 1/6 of a turn to lock the collars into place. It should be noted that the female collars on elbows and tees are not fluted in order to allow for these items to be positioned according to requirements on site. In all cases the joints should be held securely in place using the locking band, which is supplied with all components with a female collar.

Where a system is to be used on a positive pressure condensing appliance, then components, which are not designated as dry only, can be converted for this application by the addition of the lip seal or in the case of adjustable pipes, lip seals. Please refer to p.2 and 4.

Joints are not permitted within wall and ceiling spaces. Any flue pipe (i.e. single wall) connection to the chimney must be made in the same room as the appliance. The chimney must project at least 425mm below the ceiling. Where a chimney passes through a wall, a wall sleeve must be used to prevent damage to the chimney and the building.

CONNECTION TO APPLIANCE

Use the appropriate appliance connector, sealing with fire rope and fire cement or high temperature sealant on solid fuel. The length of the inner liner can be trimmed where required to allow for thermal expansion within the appliance outlet spigot.

APPLIANCE REMOVAL

Use of an adjustable length immediately above the appliance enables removal of the appliance later without dismantling the full system.

INSPECTION

To conform to Building Regulations, provisions should be made to enable a chimney to be inspected and cleaned. An inspection length or an insulated 90° or 135° Tee can form a suitable inspection point. To aid cleaning, sufficient distance should be left between changes of direction to permit the safe passage of cleaning brushes within the system. This is particularly important on solid fuel applications. It is recommended that chimneys serving solid fuel appliances be swept as frequently as necessary, but at least twice a year.

CHIMNEY DIAMETER

The chimney size should be as recommended by the appliance manufacturer and must satisfy the flue sizing requirements of EN13384-1 for single appliances, and EN13384-2 for multi appliances.

Guarantee

LIFE EXPECTANCY AND GUARANTEE

We are confident in our products and so offer you (the owner) a generous guarantee in relation to the ICID Plus system (the System). Provided that you comply with the conditions stated below, the system will be free from defects for whichever is the greater of:

- a period equal to the guarantee period of the appliance to which the Liner is first connected; or
- 20 years.

The conditions of the guarantee are:

- Correctly sized and installed in accordance with the manufacturer's instructions, current Building Regulations and relevant British and European standards.
- Maintained correctly by a qualified and competent person and maintenance records kept updated for both appliance and chimney/chimney liner.
- Used in combination with an appliance burning only approved fuels in accordance with Schiedel Chimney Systems and the appliance manufacturer's instructions.
- Register your product within 30 days of installation at **www.schiedel.co.uk** and provide us with any evidence we reasonably request to prove that your System has been fitted by a HETAS approved installer or if not, has been signed off by a Building Control Inspector prior to use.
- Familiarise yourself with the installation instructions and comply with its provisions in full during the lifetime of your usage of the product (including by keeping the required records safe). Failure to do so will invalidate any guarantee claim.

For more details about the guarantee visit our website.

For recommended fuels listings, please refer to the HETAS Guide **www.hetas.co.uk**

In the event of a fault developing in the product due to defective materials or faulty manufacture Schiedel Chimney Systems undertake to replace the product only. Schiedel Chimney Systems cannot accept liability nor take any responsibility for the installation, building or redecorating costs or any other consequential losses arising. If any complaint is found to be a result of faulty installation, non-compliance with or abuse contrary to these conditions, the cost of site investigation is chargeable.



For a direct link to the ICID Plus Installation Instructions scan the QR code.



Scan QR code to download Schiedel Installation Mobile App incorporating Product Guarantee Registration Function



Ignis-Protect

*Designed specifically for
Air Tight, Energy Efficient
and Timber Framed Buildings*



In order to meet the latest European building regulations, specific leakage and performance criteria have to be met, which are much more stringent than in the past. These criteria are key in relation to chimney products passing through combustible walls.

Schiedel Chimney Systems have invested heavily to provide tested and approved solutions to resolve these challenges and are proud to introduce their latest cutting edge product.





Protected in accordance with
European patent specification
EP 1 878 849 B1



IGNIS-PROTECT,
Winner of Best Product Award
Hearth & Home Exhibition 2015.

Product Description

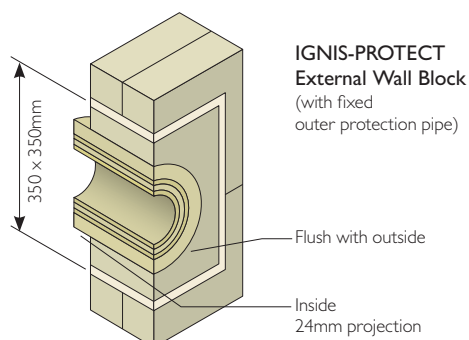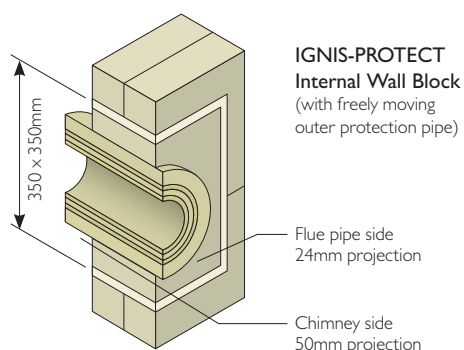

PRODUCT FEATURES

- Suitable for SW and DW connecting flue pipes passing through interior or exterior walls made of combustible materials
- Available in two versions:
For exterior walls (with aluminum laminate on inside face)
For interior walls (without aluminum laminate and with an extended removable core)
- Available in both 90° and 45° versions
- For flue gas temperature up to:
450 °C for SW connecting flue pipes (T450)
600 °C for DW connecting flue pipes (T600)
- Max. 100 °C surface temperature during soot fire
- Monolithic component made of mineral wool, density 120 kg/m³, building material class A1
- Internal face finished with aluminum laminate
- External face made with textured surface to facilitate facade rendering
- Removable pipe sections DN 125, 130, 150, 180, 200 mm
- IGNIS-PROTECT can be used without any additional protection
- Available in a range of standard wall thicknesses between 100mm -500mm

Approvals

DIBt

Zulassungs Nr. Z-7.4-3372 Deutsches Institut für Bautechnik


- Z-7.4-3372 relating to T450 designated products
- Z-7.4-3402 relating to T600 designated products

Protect Box

Engineered to meet the key challenges of modern houses...


- *Ever more air tight construction*
- *Increasing depth of loft insulation*

Schiedel Protect Box is the proven solution to safeguard distance to combustible materials in low energy and passive houses.

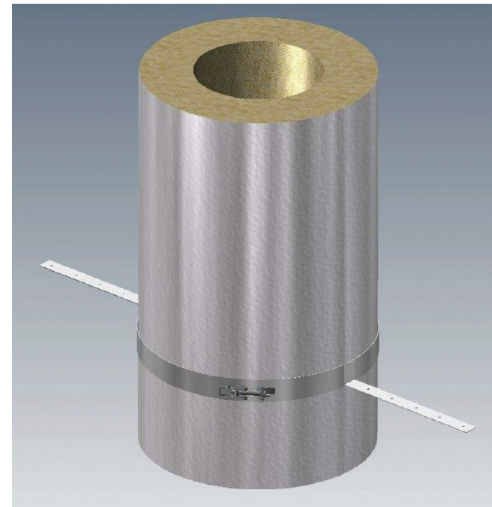

PRODUCT FEATURES

- Designed to meet blower door test.
- Constructed using a high temperature resistant Rockwool insulation with an aluminium laminate outer surface to give **zero** distance to combustibles.
- An EPDM kit is available to allow for the chimney to pass through an air tight membrane at ceiling level in a cold roof construction or at roof level in a warm roof construction.
- Standard height 700 mm to meet new roof insulation requirements.

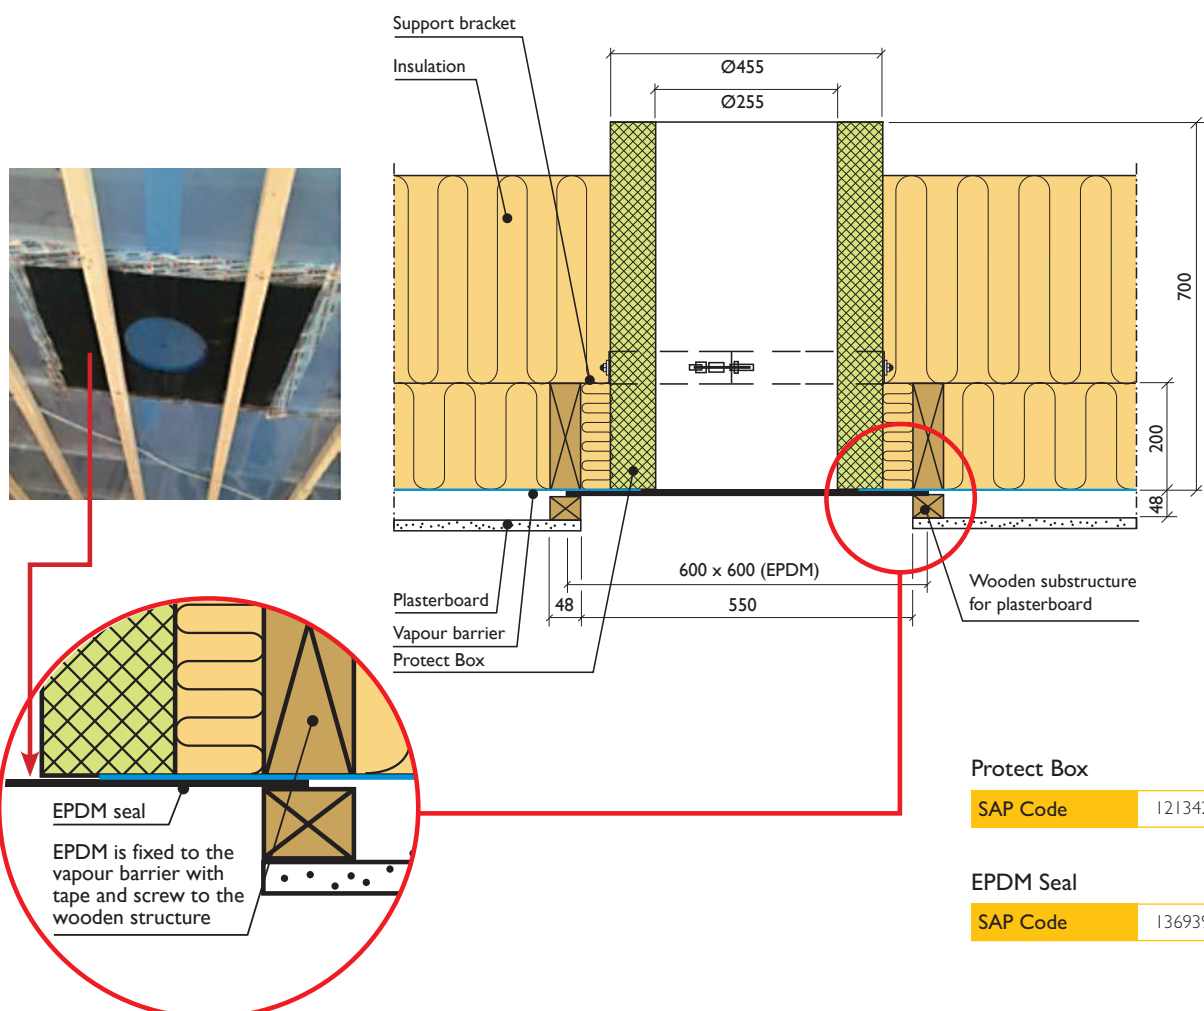

Complementary products and services from Schiedel Chimney Systems



ICS

Twin Wall Insulated System Chimney for gas, oil and multi-fuel applications.


- Simple push-fit jointing system
- High efficiency Superwool insulation blanket
- Capillary break prevents moisture being drawn through the joint
- 80-300mm Diameter range



PRIMA PLUS

Single Wall Stainless Steel Flue System.

- Prima Plus available 0.6mm or 1mm options for domestic multi-fuel stoves
- Prima Plus for large residential & commercial condensing gas & oil appliances & chimney relining
- 80-300mm Diameter range

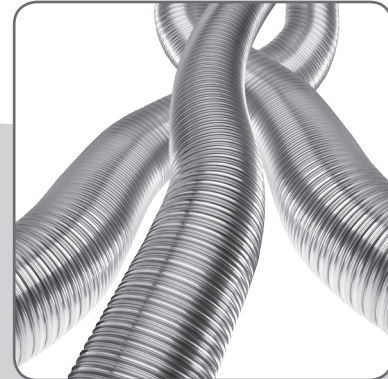

TECNOFLEX PLUS

For relining existing chimneys to take gas, oil, wood, multi-fuel appliances and open fires.


- Twin skin TecnoFlex Plus available in 316L or 904L options for oil, wood, multi-fuel & open fires
- 80-300mm Diameter range



PRIMA SMOOTH

Single Wall Stainless Steel Connecting Flue Pipe for use on wood and multi-fuel applications.

- 316L Grade stainless steel
- Available in matt black or steel finish
- Excellent aesthetics
- Lightweight
- 125-200mm internal diameters

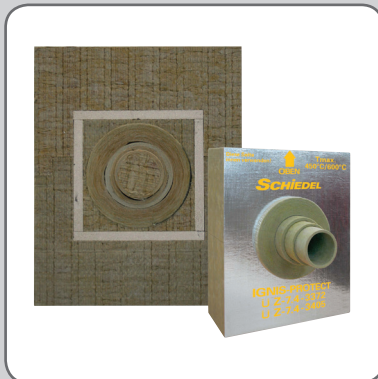

IGNIS-PROTECT

Designed specifically for Air Tight, Energy Efficient and Timber Framed Buildings



DM & LINERS

Pumice System Chimneys, Firechests and Liners.

Schiedel Chimney Systems

Crowther Estate
Washington
Tyne & Wear NE38 0AQ
Tel. +44 (0)191 416 1150
Fax. +44 (0)191 415 1263
info@schiedel.co.uk



SCHIEDEL TRAINING ACADEMY

Based in Tyne & Wear, the HETAS Approved Training Centre has a number of courses for chimney knowledge, maintenance and installation.

Visit our site, or scan the QR code for a direct link.

Visit our website
Schiedel.co.uk

Follow us on Social Media



@SchiedelUK

Part of
Standard Industries